

Technical documentation





# CDx4HC240, CDx4HCT240, CD74HC241, CDx4HCT241, CDx4HC244, CDx4HCT244 High-Speed CMOS Logic Octal Buffer/Line Drivers, Three-State

## 1 Features


- HC/HCT240 Inverting
- HC/HCT241 Non-inverting
- HC/HCT244 Non-inverting
- Typical propagation delay = 8ns at  $V_{CC}$  = 5 V,  $C_{I} = 15 \text{ pF}, T_{A} = 25^{\circ}C \text{ for HC240}$
- Three-state outputs
- Buffered inputs
- High-current bus driver outputs
- Fanout (over temperature range)
  - Standard outputs: 10 LSTTL loads
  - Bus driver outputs: 15 LSTTL loads
- Wide operating temperature range: -55°C to 125°C
- Balanced propagation delay and transition times Significant power reduction compared to LSTTL
- Logic ICs HC types:
- - 2 V to 6 V operation - High noise immunity:  $N_{IL} = 30\%$ ,  $N_{IH} = 30\%$  of  $V_{CC}$  at  $V_{CC}$  = 5 V
- HCT types:
  - 4.5 V to 5.5 V operation
  - Direct LSTTL input logic compatibility,
  - $V_{II} = 0.8 V (max), V_{IH} = 2 V (min)$
  - CMOS input compatibility,  $I_1 \le 1\mu A$  at  $V_{OI}$ ,  $V_{OH}$

## 2 Description

The 'HC240 and 'HCT240 are inverting three-state buffers having two active-low output enables. The CD74HC241, 'HCT241, 'HC244 and 'HCT244 are non-inverting three-state buffers that differ only in that the 241 has one active-high and one active-low output enable, and the 244 has two active-low output enables. All three types have identical pinouts.

Package Information										
PART NUMBER	PACKAGE <sup>(1)</sup>	BODY SIZE (NOM)								
CD74HC240	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD/4HC240	E (PDIP, 20)	25.40 mm × 6.35 mm								
CD54HC240	F (CDIP, 20)	26.92 mm × 6.92 mm								
	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD74HCT240	E (PDIP, 20)	25.40 mm × 6.35 mm								
	PW (TSSOP, 20)	6.50 mm × 4.40 mm								
CD54HCT240	F (CDIP, 20)	26.92 mm × 6.92 mm								
CD74HC241	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD74HC241	E (PDIP, 20)	25.40 mm × 6.35 mm								
CD74HCT241	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD/4HC1241	E (PDIP, 20)	25.40 mm × 6.35 mm								
CD54HCT241	F (CDIP, 20)	26.92 mm × 6.92 mm								
CD74HC244	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD/4HC244	E (PDIP, 20)	25.40 mm × 6.35 mm								
CD54HC244	F (CDIP, 20)	26.92 mm × 6.92 mm								
CD74HCT244	M (SOIC, 20)	12.80 mm × 7.50 mm								
CD/4NC1244	E (PDIP, 20)	25.40 mm × 6.35 mm								
CD54HCT244	F (CDIP, 20)	26.92 mm × 6.92 mm								

(1) For all available packages, see the orderable addendum at the end of the data sheet.









## **Table of Contents**

1 Features	
3 Revision History	
4 Pin Configuration and Functions	3
5 Specifications	1
5.1 Absolute Maximum Ratings <sup>(1)</sup>	1
5.2 Recommended Operating Conditions	1
5.3 Thermal Information	4
5.4 Electrical Characteristics '240	5
5.5 Electrical Characteristics '241	6
5.6 Electrical Characteristics '244	7
5.7 Switching Characteristics '240	3
5.8 Switching Characteristics '241	3
5.9 Switching Characteristics '244	9
6 Parameter Measurement Information1	1

7 Detailed Description	13
7.1 Overview	
7.2 Functional Block Diagram	13
8 Power Supply Recommendations	
9 Layout	15
9.1 Layout Guidelines	
10 Device and Documentation Support	
10.1 Receiving Notification of Documentation Updates	16
10.2 Support Resources	16
10.3 Trademarks	16
10.4 Electrostatic Discharge Caution	16
10.5 Glossary	16
11 Mechanical, Packaging, and Orderable	
Information	16


## **3 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision E (October 2004) to Revision F (February 2022)	Page
Updated the numbering, formatting, tables, figures, and cross-references throughout the do modern data sheet standards.	
Changes from Revision F (February 2022) to Revision G (October 2022)	Page



## **4** Pin Configuration and Functions

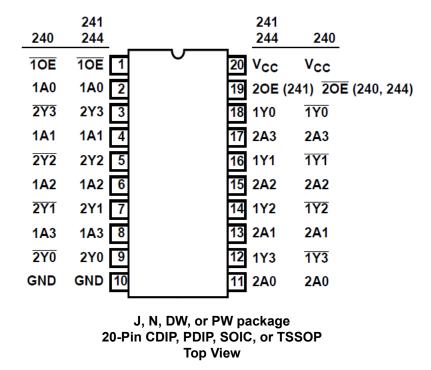

Copyright © 2022 Texas Instruments Incorporated



## **5** Specifications

#### 5.1 Absolute Maximum Ratings<sup>(1)</sup>

			MIN	MAX	UNIT		
V <sub>CC</sub>	Supply voltage		-0.5	7	V		
I <sub>IK</sub>	Input clamp diode current	For $V_l < -0.5$ V or $V_l > V_{CC} + 0.5$ V		±20	mA		
I <sub>ОК</sub>	Output clamp diode current						
lo	Drain current, per output		±35	mA			
lo	Output source or sink current per output pin	For $V_{O}$ > -0.5 V or $V_{O}$ < $V_{CC}$ + 0.5 V		±25	mA		
I <sub>CC</sub>	Continuous current through $V_{CC}$ or GND			±70	mA		
TJ	Junction temperature			150	°C		
T <sub>stg</sub>	Storage temperature range	-65	150	°C			
	Lead temperature (Soldering 10s) (SOIC - lead t	ips only)		300	°C		

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## **5.2 Recommended Operating Conditions**

			MIN	MAX	UNIT
Vaa	Supply voltage range	HC types	2	6	V
V <sub>CC</sub>		HCT types	4.5	5.5	v
V <sub>I</sub> , V <sub>O</sub>	Input or output voltage		0	V <sub>CC</sub>	V
	Input rise and fall time	2 V		1000	
tt		4.5 V		500	ns
		6 V		400	
T <sub>A</sub>	Temperature range	·	-55	125	°C

## **5.3 Thermal Information**

		DW (SOIC)	DB (SSOP)	N (PDIP)	NS (SO)	PW (TSSOP)	
THERMAL	METRIC	20 PINS	20 PINS	20 PINS	20 PINS	20 PINS	UNIT
R <sub>θJA</sub>	Junction-to-ambient thermal resistance <sup>(1)</sup>	109.1	122.7	84.6	113.4	131.8	°C/W
R <sub>θJC (top)</sub>	Junction-to-case (top) thermal resistance	76	81.6	72.5	78.6	72.2	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	77.6	77.5	65.3	78.4	82.8	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	51.5	46.1	55.3	47.1	21.5	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	77.1	77.1	65.2	78.1	82.4	°C/W
R <sub>θJC (bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	N/A	N/A	N/A	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC package thermal metrics* application report.



#### **5.4 Electrical Characteristics '240**

	PARAMETER	TEST	V 00	25°C			–40°C to 85°C		–55°C to 125°C		UNIT
	PARAMETER	CONDITIONS <sup>(2)</sup>	V <sub>CC</sub> (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
НС ТҮ	'PES	·									
			2	1.5			1.5		1.5		
VIH	High level input voltage		4.5	3.15			3.15		3.15		V
	voltage		6	4.2			4.2		4.2		
			2			0.5		0.5		0.5	
VIL	Low level input voltage		4.5			1.35		1.35		1.35	V
			6			1.8		1.8		1.8	
		I <sub>OH</sub> = – 20 μA	2	1.9			1.9		1.9		
	High level output voltage	I <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4		
V <sub>OH</sub>	voltage	I <sub>OH</sub> = – 20 μA	6	5.9			5.9		5.9		V
	High level output	I <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7		
	voltage	I <sub>OH</sub> = – 7.8 mA	6	5.48			5.34		5.2		
		I <sub>OL</sub> = 20 μA	2			0.1		0.1		0.1	
	Low level output	I <sub>OL</sub> = 20 μA	4.5			0.1		0.1		0.1	
V <sub>OL</sub>	voltage	I <sub>OL</sub> = 20 μA	6			0.1		0.1		0.1	V
	Low level output	I <sub>OL</sub> = 6 mA	4.5			0.26		0.33		0.4	
	voltage	I <sub>OL</sub> = 7.8 mA	6			0.26		0.33		0.4	
I <sub>I</sub>	Input leakage current	V <sub>I</sub> = V <sub>CC</sub> or GND	6			±0.1		±1		±1	μA
I <sub>CC</sub>	Supply current	V <sub>I</sub> = V <sub>CC</sub> or GND	6			8		80		160	μA
I <sub>OZ</sub>	Three-state leakage current		6			±0.5		±0.5		±10	μA
нст т	YPES										
V <sub>IH</sub>	High level input voltage		4.5 to 5.5	2			2		2		V
V <sub>IL</sub>	Low level input voltage		4.5 to 5.5			0.8		0.8		0.8	V
.,	High level output voltage	V <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4		
V <sub>OH</sub>	High level output voltage	V <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7		V
.,	Low level output voltage	V <sub>OL</sub> = 20 μA	4.5			0.1		0.1		0.1	
V <sub>OL</sub>	Low level output voltage	V <sub>OL</sub> = 6 mA	4.5			0.26		0.33		0.4	V
I <sub>I</sub>	Input leakage current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5			±0.1		±1		±1	μA
I <sub>CC</sub>	Supply current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5			8		80		160	μA
I <sub>OZ</sub>	Three-state leakage current		5.5			±0.5		±5		±10	μA
		nA0 - A3 inputs held at V <sub>CC</sub> – 2.1	4.5 to 5.5		100	540		675		735	μA
∆I <sub>CC</sub> (1)	Additional supply current per input pin	$1\overline{OE}$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	252		315		343	μA
		$2\overline{OE}$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	252		315		343	μA

(1) For dual-supply systems theoretical worst case (V<sub>I</sub> = 2.4 V,  $V_{CC}$  = 5.5 V) specification is 1.8 mA.

(2)  $V_I = V_{IH}$  or  $V_{IL}$ , unless otherwise noted.



#### 5.5 Electrical Characteristics '241

	PARAMETER	TEST	VacAA	25°C			–40°C to 85°C		–55°C to 125°C		UNIT	
	PARAMETER	CONDITIONS <sup>(2)</sup>	V <sub>CC</sub> (V) -	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT	
НС ТҮ	PES											
			2	1.5			1.5		1.5			
VIH	High level input voltage		4.5	3.15			3.15		3.15		V	
	, enage		6	4.2			4.2		4.2			
			2			0.5		0.5		0.5		
V <sub>IL</sub>	Low level input voltage		4.5			1.35		1.35		1.35	V	
	vonago		6			1.8		1.8		1.8		
		I <sub>OH</sub> = – 20 μA	2	1.9			1.9		1.9			
	High level output voltage	I <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4			
V <sub>OH</sub>	vonage	I <sub>OH</sub> = – 20 μA	6	5.9			5.9		5.9		V	
	High level output	I <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7			
	voltage	I <sub>OH</sub> = – 7.8 mA	6	5.48			5.34		5.2			
		I <sub>OL</sub> = 20 μA	2			0.1		0.1		0.1		
	Low level output voltage	I <sub>OL</sub> = 20 μA	4.5			0.1		0.1		0.1		
V <sub>OL</sub>	vollage	I <sub>OL</sub> = 20 μA	6			0.1		0.1		0.1	V	
	Low level output	I <sub>OL</sub> = 6 mA	4.5			0.26		0.33		0.4		
voltage	voltage	I <sub>OL</sub> = 7.8 mA	6			0.26		0.33		0.4		
l <sub>i</sub>	Input leakage current	V <sub>I</sub> = V <sub>CC</sub> or GND	6			±0.1		±1		±1	μA	
I <sub>CC</sub>	Supply current	$V_{I} = V_{CC}$ or GND	6			8		80		160	μA	
l <sub>oz</sub>	Three-state leakage current		6			±0.5		±0.5		±10	μA	
нст т	YPES											
V <sub>IH</sub>	High level input voltage		4.5 to 5.5	2			2		2		V	
V <sub>IL</sub>	Low level input voltage		4.5 to 5.5			0.8		0.8		0.8	V	
V/	High level output voltage	V <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4		V	
V <sub>OH</sub>	High level output voltage	V <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7		v	
. ,	Low level output voltage	V <sub>OL</sub> = 20 μA	4.5			0.1		0.1		0.1		
V <sub>OL</sub>	Low level output voltage	V <sub>OL</sub> = 6 mA	4.5			0.26		0.33		0.4	V	
I <sub>I</sub>	Input leakage current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5			±0.1		±1		±1	μA	
I <sub>CC</sub>	Supply current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5			8		80		160	μA	
l <sub>oz</sub>	Three-state leakage current		5.5			±0.5		±5		±10	μA	
		nA0 - A3 inputs held at V <sub>CC</sub> – 2.1	4.5 to 5.5		100	252		315		343	μA	
∆I <sub>CC</sub> (1)		$1\overline{OE}$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	252		315		343	μA	
		$20E$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	540		675		735	μA	

(1) For dual-supply systems theoretical worst case (V<sub>I</sub> = 2.4 V,  $V_{CC}$  = 5.5 V) specification is 1.8 mA.

(2)  $V_I = V_{IH}$  or  $V_{IL}$ , unless otherwise noted.



#### **5.6 Electrical Characteristics '244**

	PARAMETER	TEST	V AA	25°C			-40°C to	85℃	–55℃ to	UNIT	
	FARAMETER	CONDITIONS <sup>(2)</sup>	V <sub>CC</sub> (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
НС ТҮ	'PES										
			2	1.5			1.5		1.5		
VIH	High level input voltage		4.5	3.15			3.15		3.15		V
	vollage		6	4.2			4.2		4.2		
			2			0.5		0.5		0.5	
VIL	Low level input voltage		4.5			1.35		1.35		1.35	V
	voltage		6			1.8		1.8		1.8	
		I <sub>OH</sub> = – 20 μA	2	1.9			1.9		1.9		
	High level output	I <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4		
V <sub>ОН</sub>	voltage	I <sub>OH</sub> = – 20 μA	6	5.9			5.9		5.9		V
	High level output	I <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7		
	voltage	I <sub>OH</sub> = – 7.8 mA	6	5.48			5.34		5.2		
		I <sub>OL</sub> = 20 μA	2			0.1		0.1		0.1	
	Low level output	I <sub>OL</sub> = 20 μA	4.5			0.1		0.1		0.1	
V <sub>OL</sub>	voltage	I <sub>OL</sub> = 20 μA	6			0.1		0.1		0.1	V
01	Low level output	$I_{OL} = 6 \text{ mA}$	4.5			0.26		0.33		0.4	
	voltage	I <sub>OL</sub> = 7.8 mA	6			0.26		0.33		0.4	
l <sub>l</sub>	Input leakage current	$V_{I} = V_{CC}$ or GND	6			±0.1		±1		±1	μA
	Supply current	$V_{I} = V_{CC}$ or GND	6			8		80		160	μA
I <sub>OZ</sub>	Three-state leakage current		6			±0.5		±0.5		±10	μA
нст т	YPES										
V <sub>IH</sub>	High level input voltage		4.5 to 5.5	2			2		2		V
V <sub>IL</sub>	Low level input voltage		4.5 to 5.5			0.8		0.8		0.8	V
\ <i>\</i>	High level output voltage	V <sub>OH</sub> = – 20 μA	4.5	4.4			4.4		4.4		V
V <sub>OH</sub>	High level output voltage	V <sub>OH</sub> = – 6 mA	4.5	3.98			3.84		3.7		v
	Low level output voltage	V <sub>OL</sub> = 20 μA	4.5		·	0.1		0.1		0.1	V
V <sub>OL</sub>	Low level output voltage	V <sub>OL</sub> = 6 mA	4.5			0.26		0.33		0.4	v
l <sub>l</sub>	Input leakage current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5			±0.1		±1		±1	μA
I <sub>CC</sub>	Supply current	$V_{I} = V_{CC}$ or GND	5.5			8		80		160	μA
l <sub>oz</sub>	Three-state leakage current		5.5			±0.5		±5		±10	μA
		nA0 - A3 inputs held at V <sub>CC</sub> – 2.1	4.5 to 5.5		100	252		315		343	μA
∆I <sub>CC</sub> (1)		$1\overline{OE}$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	252		315		343	μA
		$2\overline{OE}$ inputs held at $V_{CC} - 2.1$	4.5 to 5.5		100	252		315		343	μA

(1) For dual-supply systems theoretical worst case (V<sub>I</sub> = 2.4 V,  $V_{CC}$  = 5.5 V) specification is 1.8 mA.

(2)  $V_I = V_{IH}$  or  $V_{IL}$ , unless otherwise noted.



## 5.7 Switching Characteristics '240

 $C_L$  = 50 pF, Input  $t_r$ ,  $t_f$  = 6 ns

				25°C		-40°	°C to 85°	c 🛛	–55°	UNIT		
	PARAMETER	V <sub>cc</sub> (V)	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
НС ТҮ	PES	1 1	·····		I	· · ·						
		2			100			125			150	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation delay Data to outputs	4.5		8 <sup>(3)</sup>	20			25			30	ns
PHL	Data to outputs	6			17			21			26	
		2			150			190			225	
t <sub>THL</sub> ,	Output enable and disable	4.5			30			38			45	
t <sub>TLH</sub>	time	5		12								ns
		6			26			33			38	
		2			60			75			90	
t <sub>TLH</sub> , t <sub>THL</sub>	Output transition time	4.5			12			15			18	ns
		6			10			13			15	
CI	Input capacitance		10		10			10			10	pF
Co	Three-state output capacitance				20			20			20	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		38 <sup>(3)</sup>								pF
нст т	YPES				I			I				
t <sub>PHL</sub> , t <sub>PLH</sub>	Data to outputs	4.5		9 <sup>(3)</sup>	22			28			33	ns
t <sub>TLH</sub> , t <sub>THL</sub>	Output enable and disable times	4.5			30			38			45	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Output transition time	4.5			12			15			18	ns
CI	Input capacitance		10		10			10			10	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		40								pF

 $C_{\text{PD}}$  is used to determine the dynamic power consumption, per channel. (1)

(2)  $P_D = V_{CC} {}^2f_i (C_{PD} + C_L)$  where  $f_i$  = input frequency,  $f_O$  = output frequency,  $C_L$  = output load capacitance,  $V_{CC}$  = supply voltage. (3)  $C_L$  = 15 pF and  $V_{CC}$  = 5 V.



## 5.8 Switching Characteristics '241

 $C_L$  = 50 pF, Input  $t_r$ ,  $t_f$  = 6 ns

				25°C		-40	°C to 85°	c	–55°	UNIT		
	PARAMETER	V <sub>cc</sub> (V)	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
НС ТҮ	PES				#							
		2			110			140			165	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation delay Data to outputs	4.5		9 <sup>(3)</sup>	22			28			33	ns
PHL		6			19			24			28	
		2			150			190			225	
t <sub>THL</sub> ,	Output enable and disable	4.5			30			38			45	ns
t <sub>TLH</sub>	time	5		12								115
		6			26			33			38	
		2			60			75			90	
t <sub>TLH</sub> , t <sub>THL</sub>	Output transition time	4.5			12			15			18	ns
TTHL		6			10			13			15	
CI	Input capacitance		10		10			10			10	pF
Co	Three-state output capacitance				20			20			20	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		34 <sup>(3)</sup>								pF
нст т	YPES											
t <sub>PHL</sub> , t <sub>PLH</sub>	Data to outputs	4.5		10 <sup>(3)</sup>	25			31			38	ns
t <sub>TLH</sub> , t <sub>THL</sub>	Output enable and disable times	4.5			30			38			45	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Output transition time	4.5			12			15			18	ns
CI	Input capacitance		10		10			10			10	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		38								pF

(1) C<sub>PD</sub> is used to determine the dynamic power consumption, per channel.

(2)  $P_D = V_{CC} {}^2f_i (C_{PD} + C_L)$  where  $f_i$  = input frequency,  $f_O$  = output frequency,  $C_L$  = output load capacitance,  $V_{CC}$  = supply voltage. (3)  $C_L$  = 15 pF and  $V_{CC}$  = 5 V.



## 5.9 Switching Characteristics '244

 $C_L$  = 50 pF, Input  $t_r$ ,  $t_f$  = 6 ns

	PARAMETER		V <sub>cc</sub> (V) 25℃			–40℃ to 85℃			–55°	UNIT		
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
НС ТҮ	PES											
		2			110			140			165	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation delay Data to outputs	4.5		9 <sup>(3)</sup>	22			28			33	ns
FIL		6			19			24			28	
		2			150			190			225	
t <sub>THL</sub> ,	Output enable and disable	4.5			30			38			45	ne
t <sub>TLH</sub>	time	5		12								ns
		6			26			33			38	
t <sub>TLH</sub> , t <sub>THL</sub>	Output transition time	2			60			75			90	
		4.5			12			15			18	ns
		6			10			13			15	
CI	Input capacitance		10		10			10			10	pF
Co	Three-state output capacitance				20			20			20	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		46 <sup>(3)</sup>		·						pF
нст т	YPES							1				
t <sub>PHL</sub> , t <sub>PLH</sub>	Data to outputs	4.5		10 <sup>(3)</sup>	25			31			38	ns
t <sub>TLH</sub> , t <sub>THL</sub>	Output enable and disable times	4.5			30			38			45	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Output transition time	4.5			12			15			18	ns
CI	Input capacitance		10		10			10			10	pF
C <sub>PD</sub>	Power dissipation capacitance <sup>(1)</sup> <sup>(2)</sup>	5		40								pF

(1) C<sub>PD</sub> is used to determine the dynamic power consumption, per channel.

(2)  $P_D = V_{CC} {}^2f_i (C_{PD} + C_L)$  where  $f_i$  = input frequency,  $f_O$  = output frequency,  $C_L$  = output load capacitance,  $V_{CC}$  = supply voltage. (3)  $C_L$  = 15 pF and  $V_{CC}$  = 5 V.




## 6 Parameter Measurement Information


Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>t</sub> < 6 ns.


For clock inputs, f<sub>max</sub> is measured when the input duty cycle is 50%.


The outputs are measured one at a time with one input transition per measurement.



(1) C<sub>L</sub> includes probe and test-fixture capacitance.



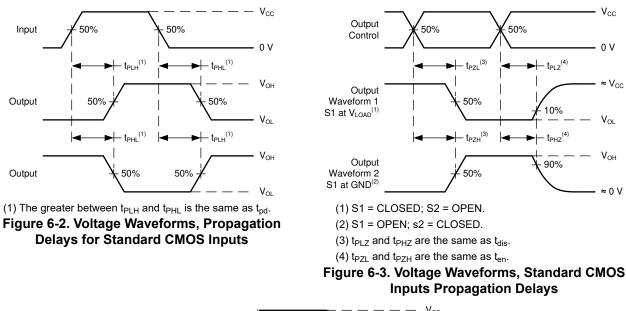




(1) The greater between t<sub>r</sub> and t<sub>f</sub> is the same as t<sub>t</sub>.

Figure 6-4. Voltage Waveforms, Input and Output Transition Times for Standard CMOS Inputs


V<sub>CC</sub>

Product Folder Links: CD54HC240 CD74HC240 CD74HC241 CD54HC244 CD74HC244 CD54HCT240 CD74HCT240 CD54HCT241 CD74HCT241 CD54HCT244 CD74HCT244

#### CD54HC240, CD74HC240, CD74HC241, CD54HC244 CD74HC244, CD54HCT240, CD74HCT240, CD54HCT241 CD74HCT241, CD54HCT244, CD74HCT244 SCHS167G – NOVEMBER 1998 – REVISED OCTOBER 2022



 (1) The greater between t<sub>PLH</sub> and t<sub>PHL</sub> is the same as t<sub>pd</sub>.
 Figure 6-5. Voltage Waveforms, Propagation Delays for TTL-Compatible Inputs



Texas

INSTRUMENTS

www.ti.com

(2)  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .

Figure 6-6. Voltage Waveforms, TTL-Compatible CMOS Inputs Propagation Delays



## 7 Detailed Description

## 7.1 Overview

The 'HC240 and 'HCT240 are inverting three-state buffers having two active-low output enables. The CD74HC241, 'HCT241, 'HC244 and 'HCT244 are non-inverting threestate buffers that differ only in that the 241 has one active-low output enable, and the 244 has two active-low output enables. All three types have identical pinouts.

## 7.2 Functional Block Diagram




Figure 7-1. Functional Block Diagram '240

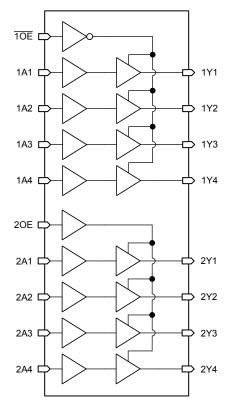


Figure 7-2. Functional Block Diagram '241

Copyright © 2022 Texas Instruments Incorporated

#### **CD54HC240, CD74HC240, CD74HC241, CD54HC244 CD74HC244, CD54HCT240, CD74HCT240, CD54HCT241 CD74HCT241, CD54HCT244, CD74HCT244** SCHS167G – NOVEMBER 1998 – REVISED OCTOBER 2022






Figure 7-3. Functional Block Diagram '244

14 Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated



## 8 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. A 0.1- $\mu$ F capacitor is recommended for this device. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. The 0.1- $\mu$ F and 1- $\mu$ F capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for best results.

## 9 Layout

#### 9.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices, inputs must not ever be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or  $V_{CC}$ , whichever makes more sense for the logic function or is more convenient.



## **10 Device and Documentation Support**

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

#### **10.1 Receiving Notification of Documentation Updates**

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### **10.2 Support Resources**

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 10.3 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments. All trademarks are the property of their respective owners.

#### **10.4 Electrostatic Discharge Caution**



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 10.5 Glossary

TI Glossary This glossary lists and explains terms, acronyms, and definitions.

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CD54HC240F3A	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	8407401RA CD54HC240F3A	Samples
CD54HC244F	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	CD54HC244F	Samples
CD54HC244F3A	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	8409601RA CD54HC244F3A	Samples
CD54HCT240F3A	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	8550501RA CD54HCT240F3A	Samples
CD54HCT241F3A	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	CD54HCT241F3A	Samples
CD54HCT244F	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	CD54HCT244F	Samples
CD54HCT244F3A	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	8513001RA CD54HCT244F3A	Samples
CD74HC240E	ACTIVE	PDIP	Ν	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC240E	Samples
CD74HC240M	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC240M	Samples
CD74HC240M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC240M	Samples
CD74HC241E	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC241E	Samples
CD74HC241M	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC241M	Samples
CD74HC241M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC241M	Samples
CD74HC244E	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC244E	Samples
CD74HC244EE4	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC244E	Samples
CD74HC244M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC244M	Samples
CD74HC244M96E4	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC244M	Samples
CD74HC244M96G4	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC244M	Samples

#### www.ti.com

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CD74HCT240E	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HCT240E	Samples
CD74HCT240EE4	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HCT240E	Samples
CD74HCT240M	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCT240M	Samples
CD74HCT240M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCT240M	Samples
CD74HCT240PW	ACTIVE	TSSOP	PW	20	70	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HK240	Samples
CD74HCT240PWR	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HK240	Samples
CD74HCT240PWT	ACTIVE	TSSOP	PW	20	250	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HK240	Samples
CD74HCT241E	ACTIVE	PDIP	Ν	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HCT241E	Samples
CD74HCT241M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCT241M	Samples
CD74HCT244E	ACTIVE	PDIP	Ν	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HCT244E	Samples
CD74HCT244M96	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCT244M	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.



#### www.ti.com

## PACKAGE OPTION ADDENDUM

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# OTHER QUALIFIED VERSIONS OF CD54HC240, CD54HC244, CD54HCT240, CD54HCT241, CD54HCT244, CD74HC240, CD74HC244, CD74HCT240, CD74HCT241, CD74HCT244 :

• Catalog : CD74HC240, CD74HC244, CD74HCT240, CD74HCT241, CD74HCT244

• Military : CD54HC240, CD54HC244, CD54HCT240, CD54HCT241, CD54HCT244

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications



Texas

STRUMENTS

## TAPE AND REEL INFORMATION





#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HC240M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HC241M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HC244M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HCT240M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HCT240PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
CD74HCT240PWT	TSSOP	PW	20	250	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
CD74HCT241M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HCT241M96	SOIC	DW	20	2000	330.0	24.4	10.9	13.3	2.7	12.0	24.0	Q1
CD74HCT244M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74HCT244M96	SOIC	DW	20	2000	330.0	24.4	10.9	13.3	2.7	12.0	24.0	Q1



www.ti.com

# PACKAGE MATERIALS INFORMATION

27-Jun-2023

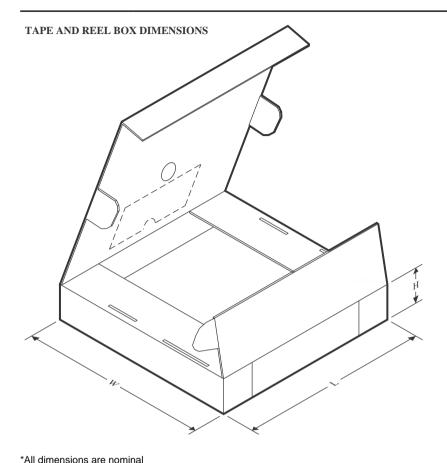

All dimensions are nominal	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74HC240M96	SOIC	DW	20	2000	367.0	367.0	45.0
CD74HC241M96	SOIC	DW	20	2000	367.0	367.0	45.0
CD74HC244M96	SOIC	DW	20	2000	367.0	367.0	45.0
CD74HC244M96	SOIC	DW	20				
				2000	367.0	367.0	45.0
CD74HCT240PWR	TSSOP	PW	20	2000	356.0	356.0	35.0
CD74HCT240PWT	TSSOP	PW	20	250	356.0	356.0	35.0
CD74HCT241M96	SOIC	DW	20	2000	367.0	367.0	45.0
CD74HCT241M96	SOIC	DW	20	2000	356.0	356.0	41.0
CD74HCT244M96	SOIC	DW	20	2000	367.0	367.0	45.0
CD74HCT244M96	SOIC	DW	20	2000	356.0	356.0	41.0

## TEXAS INSTRUMENTS

www.ti.com

27-Jun-2023

## TUBE



## - B - Alignment groove width

*All dimensions are nominal	
r	_

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	Τ (μm)	B (mm)
CD74HC240E	N	PDIP	20	20	506	13.97	11230	4.32
CD74HC240M	DW	SOIC	20	25	507	12.83	5080	6.6
CD74HC241E	N	PDIP	20	20	506	13.97	11230	4.32
CD74HC241M	DW	SOIC	20	25	507	12.83	5080	6.6
CD74HC244E	N	PDIP	20	20	506	13.97	11230	4.32
CD74HC244EE4	N	PDIP	20	20	506	13.97	11230	4.32
CD74HCT240E	N	PDIP	20	20	506	13.97	11230	4.32
CD74HCT240EE4	N	PDIP	20	20	506	13.97	11230	4.32
CD74HCT240M	DW	SOIC	20	25	507	12.83	5080	6.6
CD74HCT240PW	PW	TSSOP	20	70	530	10.2	3600	3.5
CD74HCT241E	N	PDIP	20	20	506	13.97	11230	4.32
CD74HCT244E	N	PDIP	20	20	506	13.97	11230	4.32

J (R-GDIP-T\*\*) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- $\triangle$  The 20 pin end lead shoulder width is a vendor option, either half or full width.



# **DW0020A**



# **PACKAGE OUTLINE**

## SOIC - 2.65 mm max height

SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



# DW0020A

# **EXAMPLE BOARD LAYOUT**

## SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# DW0020A

# **EXAMPLE STENCIL DESIGN**

## SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **PW0020A**



# **PACKAGE OUTLINE**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



# PW0020A

# **EXAMPLE BOARD LAYOUT**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# PW0020A

# **EXAMPLE STENCIL DESIGN**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## LAND PATTERN DATA



NOTES: Α. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
  C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated